

# 260MRT

## MINI ROUGH TERRAIN SCISSOR LIFT



**Standard Four-Wheel  
Drive for Terrainability**





**Large, High Capacity  
Work Platform**



**Strengthened Arm  
Stack for Improved  
Stack Rigidity**



# JLG MODEL 260MRT

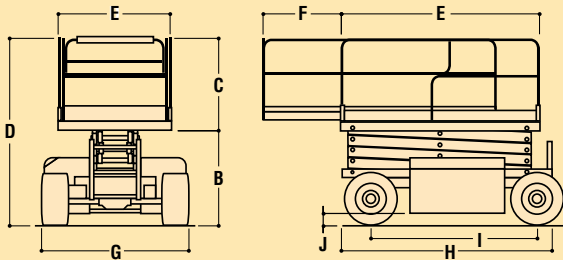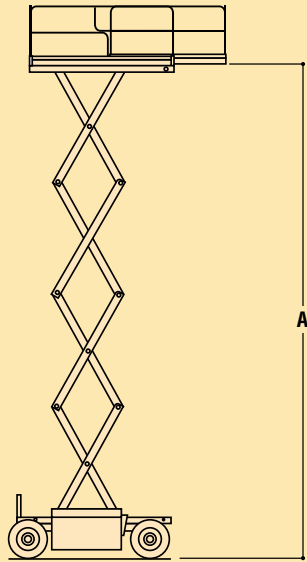

## DIMENSIONAL DATA

A. Platform Height Elevated	26 ft. (7.92 m)
B. Platform Height Lowered	4 ft. 1.5 in. (1.26 m)
C. Platform Railing Height	3 ft. 7.5 in. (1.0 m)
D. Overall Height	7 ft. 9.5 in. (2.37 m)
E. Platform Size	65 x 102 in. (1.65 x 2.59 m)
F. Platform Extension	4 ft. (1.22 m)
G. Overall Width	5 ft. 9 in. (1.75 m)
H. Overall Length (no outriggers)	8 ft. 9 in. (2.67 m)
I. Wheelbase	6 ft. 6 in. (1.98 m)
J. Ground Clearance	8 in. (20 cm)
Platform Capacity	1,250 lbs. (567 kg)
Capacity on Deck Extension	300 lbs. (136 kg)
Lift/Lower Speed	27/21 sec.
Maximum Drive Height	Full Height
Gross Vehicle Weight	7,100 lbs. (3,221 kg)

## CHASSIS

Drive Speed-Lowered	3.5 mph (5.6 kph)
Drive Speed-Elevated	0.4 mph (0.6 kph)
Gradeability	35%
Turning Radius (inside)	84 in. (2.13 m)
Tire Size/Type	26 x 12 Lug Tread
Brakes	Spring Applied Hydraulically Released

## POWER SYSTEM

Dual Fuel Engine	Kubota 24.5 hp (18.3 kW)
Diesel Engine	Kubota 26 hp (19.4 kW)
Fuel Tank Capacity	7.5 gal. (28.4 L)
Hydraulic Reservoir	15 gal. (56.9 L)

# PERFORMANCE FEATURES

## Standard Features

65 x 102 in. (1.65 x 2.59 m) Steel Platform  
 4 ft. (1.22 m) Manual Roll-Out Deck Extension  
 Fold-Down Platform Rails  
 Access Gate with Chain  
 Moveable, Removable Platform Control Box  
 Proportional Hydrostatic Drive Control with Thumb Steer  
 Proportional Lift Up  
 110V-AC Receptacle in Platform  
 Horn  
 Hourmeter  
 3 Degree Slope Alarm and Light  
 Descent Alarm  
 Lubrication-Free Scissor Arm Bushings  
 Scissor Maintenance Prop

Manual Descent Pull Cable  
 Heavy Gauge Steel Chassis Hoods  
 Brake and Motor Release for Low-Speed Towing  
 Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners  
 Kubota 750 Water Cooled, 22.8 hp Dual Fuel Engine  
 26 x 12 in. Lug Tread Tires

## Available Options

26 x 12 Foam Filled Tires  
 Platform Work Lights  
 Full Swing-Gate  
 110V-AC Generator  
 All Motion Alarm  
 Flashing Beacon  
 33.5 lb. (19.73 Kg) Propane Tank  
 Hydraulic Leveling Jacks

## Big Performance in a Small Package

Only JLG can put this much performance in such a compact scissor lift. The 260MRT Mini Rough Terrain Scissor Lift delivers exceptional mobility on or off slab thanks to a narrow 69-inch (1.75 m) chassis that fits into tight spaces and standard four-wheel drive that travels 35% grades. Large deck space and large capacity are advantages that make a big difference in productivity!

## Major Advantages

- Standard four-wheel drive with 35% gradeability
- Large, high-capacity operator work platform
- Stronger armstack
- Simplified ground control wiring for ease of service

## The JLG "1 & 5" Warranty

JLG Industries, Inc. backs our products with our exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) full years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453 and ANSI A92.6-1999 as originally manufactured for intended applications.

## The JLG Promise

*Whether you rent or own a JLG lift, you can expect the best in terms of safety, reliability, productivity and ease of use for the operator.*

## JLG Industries, Inc.

1 JLG Drive  
 McConnellsburg, PA 17233-9553  
 Telephone 717-485-5161  
 Toll-free in US 877-JLG-LIFT  
 Fax 717-485-6417  
 www.jlg.com

