


Genie GS-2668 RT/GS-3268 RT Specifications

Self-Propelled Scissor Lift

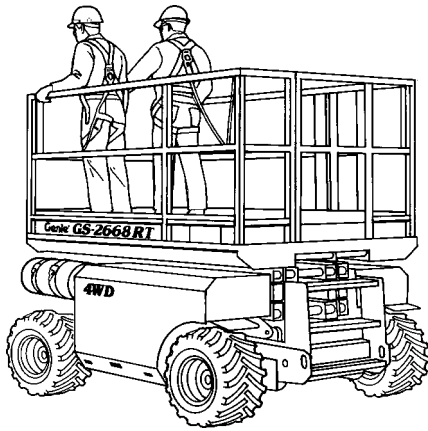

STANDARD FEATURES

- Four-wheel drive
- Large platform with 60 in (1.52 m) roll-out extension and durable diamond plate aluminum flooring
- Proportional drive
- High-speed/high-torque selector switch
- Multiple disc brakes provide smooth deceleration
- Two-speed lift functions
- Emergency stop switches at platform and ground controls

SPECIFICATIONS

| MODEL | GS-2668 RT | | GS-3268 RT | |
|------------------------------------|---|----------|--------------------|----------|
| | US | Metric | US | Metric |
| Working height | 32 ft | 9.75 m | 38 ft | 11.58 m |
| Platform height | 26 ft | 7.9 m | 32 ft | 9.75 m |
| Height-stowed (guardrails) | 91 1/2 in | 2.32 m | 96 1/2 in | 2.45 m |
| Height-stowed (guardrails lowered) | 67 in | 1.7 m | 72 in | 1.83 m |
| Height-stowed (platform) | 46 3/4 in | 1.19 m | 51 3/4 in | 1.31 m |
| Length-stowed | 105 in | 2.67 m | 105 in | 2.67 m |
| Length-platform extended | 161 1/2 in | 4.1 m | 161 1/2 in | 4.1 m |
| Width | 68 in | 1.73 m | 68 in | 1.73 m |
| Wheelbase | 73 in | 1.85 m | 73 in | 1.85 m |
| Ground clearance | 7 1/2 in | 19 cm | 7 1/2 in | 19 cm |
| Platform width | 61 in | 1.55 m | 61 in | 1.55 m |
| Platform length-stowed | 99 in | 2.5 m | 99 in | 2.5 m |
| Platform length-extended | 156 in | 3.96 m | 156 in | 3.96 m |
| Roll-out platform extension | 60 in | 1.52 m | 60 in | 1.52 m |
| Lift capacity | 1,250 lb | 567 kg | 1,000 lb | 454 kg |
| Extension deck capacity | 300 lb | 136 kg | 300 lb | 136 kg |
| Turning radius-outside | 145 in | 3.68 m | 145 in | 3.68 m |
| Turning radius-inside | 60 in | 1.52 m | 60 in | 1.52 m |
| Power source | Kubota 23 hp (17 kw) Gas/LPG, both models Kubota 20 hp (15 kw) diesel, both models | | | |
| Drive speed - stowed | 3.6 mph | 5.8 km/h | 3.6 mph | 5.8 km/h |
| Drive speed - raised | 0.5 mph | 0.8 km/h | 0.5 mph | 0.8 km/h |
| Raise/lower speed | 30/35 sec | | 40/37 sec | |
| Controls | proportional drive | | proportional drive | |
| Tires | 12-23 1/2 in | 30-60 cm | 12-23 1/2 in | 30-60 cm |
| Gradeability | 40% | | 35% | |
| Drive | four wheel, both models | | | |
| Multiple disc brakes | dual rear wheel, both models | | | |
| Hydraulic tank capacity | 21 1/2 gal | 81 litre | 21 1/2 gal | 81 litre |
| Fuel tank capacity | 15 gal | 57 litre | 15 gal | 57 litre |
| Weight | 6,550 lb | 2,971 kg | 7,520 lb | 3,411 kg |

Genie Industries

USA 18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
Telephone (425) 881-1800
Toll Free USA/Canada 800-536-1800
Fax (425) 883-3475
<http://www.genielift.com>

UK The Maltings, Wharf Road
Grantham
Lincolnshire NG31 6BH
Telephone (44) 01476-584333
Fax (44) 01476-584334
<http://www.genielift.com>

Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The drawings in this brochure are for illustrative purposes only. Refer to the appropriate Genie GS-2668 RT and Genie GS-3268 RT Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using a Genie GS-2668 RT or GS-3268 RT, or to otherwise act irresponsibly, may result in serious injury or death. Copyright © 1998 by Genie Industries. "Genie" is a Registered Trademark of Genie Industries in the USA and many other countries. "GS" is a Trademark of Genie Industries. Genie is the owner of US Patent 6,050,358 and Patents Pending. 2-5-01